

WKB-803A

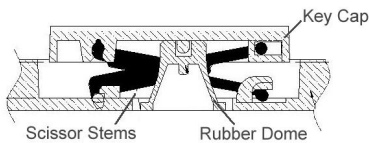

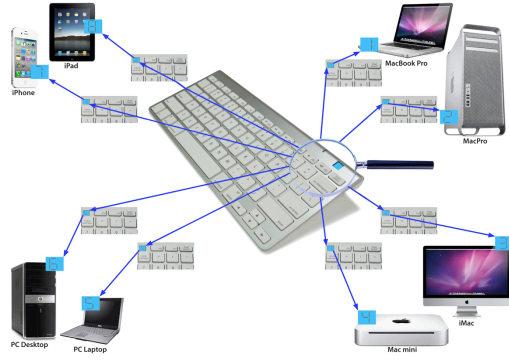
Compact Bluetooth PC / Mac Compatible Keyboard

Multi-host switchable, register up to 8 hosts



WKB-803A, is at the forefront of cutting edge wireless keyboard with multi-host switchable feature (patented). It is an ideal wireless keyboard for using iMac, iPad, iPhone or other Android OS Tablets in between, thanks to multi-host switchable feature. This compact size keyboard comes equipped with Bluetooth 3.0 technology with 2 x AA batteries, scissor-type key mechanism among many other features.

SPECIFICATION

Key Number	78/ 79 keys (US/ EU)	Scissor-type Key Switch 
Tx Technology	Bluetooth® wireless technology, V3.0	
Feature key	" host select " key + 1, 2 ~ 8 keys for host select	
HTN Display	1 digit HTN display, monochrome	
Number of Host Register	Register up to 8 different Bluetooth hosts	
Antenna/ Antenna Gain	PCB antenna / 0 dBi (Typ)	
Frequency/ Channels	2.402Ghz ~ 2.480Ghz/ 79 channels	
Modulation	GFSK (Differential phase shift keying)	
Output Power	Normal mode (GFSK): -0.61 dBm	
Data Rate / Sensitivity	Up to 2.1Mbps / <0.1% BER at -70dBm	
Operating Range	Up to 8 M (Free space)	
Key Switch	Scissor-type Membrane with 5 million life cycle	
Key Force/ Traveling Distance	55 +/- 7 gm; 2.1 +/- 0.2 mm	
LED Indicator	Indicate pairing (blinking), Host link in blue LED, CapLock (5 Min. Max.) and Low battery (blinking)	
Function Keys for Mac	F1 Decrease Brightness, F2 Increase Brightness, F3 Expose, F4 Dashboard	
Holding Fn Keys for Windows	Fn + F1 = help etc.	
Switch / Button	1 x power switch, 1 x pairing button	
Power Source	3.0 VDC, 2 x AA Alkaline batteries	
Operating Temperature	0 to 50 degrees Celsius (10% to 95% RH, 25 degree Celsius)	
Storage Temperature	-10 to 65 degrees Celsius (5% to 90% RH, 25 degree Celsius)	
Dimension (mm)	285.0 (L) x 132.0 (W) x 18.5 (H)mm	
Compatibility	Compatible with Windows XP or later, Mac OS 10.6 or later, Android OS of smart phone and	
Accessories	2 x AA batteries, 1 x User's manual	
Packing Information	TBD	

Host select key

You can press "host select" key (please do not hold the key) and choose 1 or 2, 3 ..8 keys, located beneath F1...F8 key, to register different Bluetooth host up to 8 hosts.



* Features and specification are subject to change without notice.

DIGIMORE

DIGIMORE YOUR LIFE

DIGIMORE ELECTRONICS CO., LTD

10 Fl., No. 61, Yan-Ping S. Rd., Taipei 100, Taiwan

TEL: +886 2 2311 3299 FAX: +886 2 2311 3375

Email: info@capacity-keyboard.com <http://www.capacity-keyboard.com>