


Desktop/ Industrial 2 Zone Keyboard Module



KBM-3000 is a two zone keyboard module which is specially designed for desktop/ industrial use. Its compact size and modularized mechanical design provides flexible product configuration and easy maintenance. With scissor-type key switch, it makes the touch and feel of the keycaps exceptional. We also optionally provide controller or customized codes and touchpad module as demand.

SPECIFICATION		
Key Number	104/ 105 keys (US/ EU)	
Key Switch	Scissor-type membrane switch with 5 million life cycle time rubber dome	
Key Force	60 +/- 8 gm	
Traveling Distance	2.8 +/- 0.2 mm	Key Cap Silicon Rubber Dome
Input Power	5 VDC, 100mA	X-Type Outrigger Outrigger Fix Board Membrane
Key Pitch	0.85 mm/ 19.05 (key centre-to-centre)	Metal Plate
Layout Area	385.29 (L) x 107.66 (W) mm	l
Module Dimension	391.30 (L) X 113.64 (W) x 6.9 (H) mm	
Operating Temperature	0 to 55 degrees Celsius (10% to 85% RH, 25 degree Celsius)	
Storage Temperature	-10 to 60 degrees Celsius (5% to 90% RH, 25 degree Celsius)	
Weight	300 +/- 5g (with metal plate)	
Option	USB keyboard controller (PS/2 also available), TouchPad Module	

DIMENSION

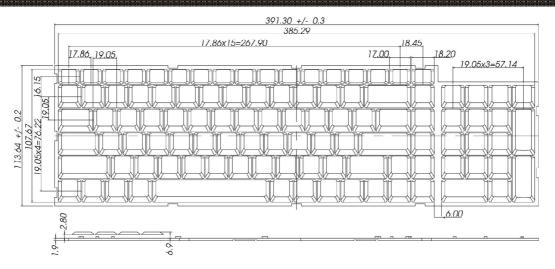

^{*} Features and specification are subject to change without notice.



DIGIMORE ELECTRONICS CO., LTD

10 Fl., No. 61, Yan-Ping S. Rd., Taipei 100, Taiwan TEL: +886 2 2311 3299 FAX: +886 2 2311 3375

Email: info@capacity-keyboard.com http://www.capacity-keyboard.com